

	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Vee Tile	500mm x 500mm	19.68 in. x 19.68 in.	12mm (0.47 in.)	15 lbs	10	26.92

All specs refer to singular products and not multiples unless specified.

Vee Tile

Vee Tile is a modular acoustic design element with distinct patterning and color. The CNC-cut notch styling links together across tiles and can be oriented in a variety of directions to create multiple looks. Mix and match colors or use large color zones to boldly define spaces and control sound. Measure out guidelines prior to mounting tiles. Peel and stick design allows for easy installation.

NRC (SOUND ABSORPTION RATING): ASTM C423-90A

NRC .36

Fire Rating

ASTM E84 Class C (Class A treatment available.)


VOC Emissions

ASTM D5116 Rate: <0.015 mg/m²/hr (7 days)


ECHOPANEL TILES: VEE

kirei

Available solid colors

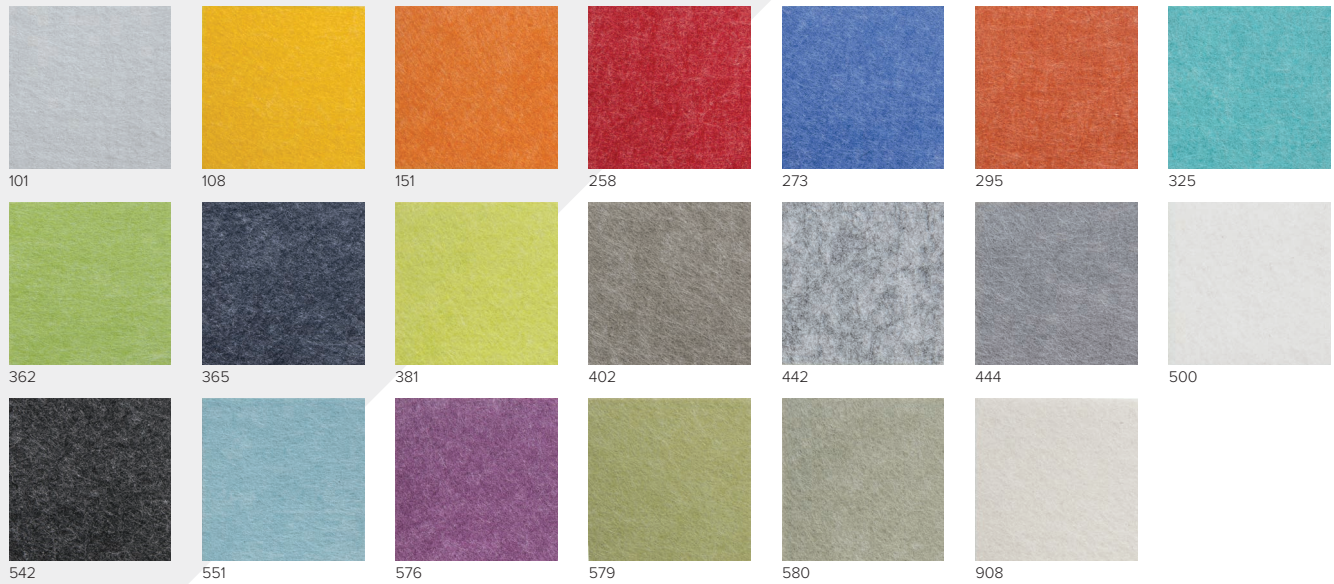

Hardware

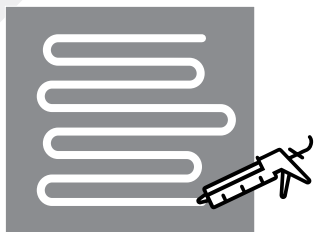

Mount

When mounting use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.

kireiechopanel[®]
simple sound solutions

To learn more about pricing and installation call 619.236.9924, or visit kireiusa.com

JAN 2018