

H-Baffle I Color 444 (Gray)



H-Baffle I Color 276 (Lavendar)

|            | Metric         | Standard       | Width | Weight  | LF/Unit |
|------------|----------------|----------------|-------|---------|---------|
| 40" Length | 1016mm x 229mm | 40 in. x 9 in. | 84mm  | 4.5 lbs | 3.3     |
| 48" Length | 1219mm x 229mm | 48 in. x 9 in. | 84mm  | 5 lbs   | 4       |
| 72" Length | 1829mm x 229mm | 72 in. x 9 in. | 84mm  | 8 lbs   | 6       |
| 96" Length | 2438mm x 229mm | 96 in. x 9 in. | 84mm  | 10 lbs  | 8       |

*All specs refer to singular products and not multiples unless specified. Custom options available upon request.*

**H-Baffle**

The EchoPanel® H-Baffle is designed to look great while dispersing and absorbing excessive noise. The H-Baffle can be ceiling hung at any height using cable or rod. Hang EchoPanel H-Baffles in regular rows or random groupings to create wayfinding or other visual design solutions. Custom configurations available.

**NRC (SOUND ABSORPTION RATING): ASTM C423-90A**

Standard EchoPanel® NRC acoustic data is available for acoustic calculations. Please contact Kirei for this test data.

**Fire Rating**

ASTM E84 Class C (Class A treatment available.)


**VOC Emissions**

CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m3  
 Ecospecifier GreenTag Compliant;  
 TVOC: 0.015 mg/m2/hr (ASTM D5116)




H-Baffle I Color 444 (Gray)

## Available Solid Colors

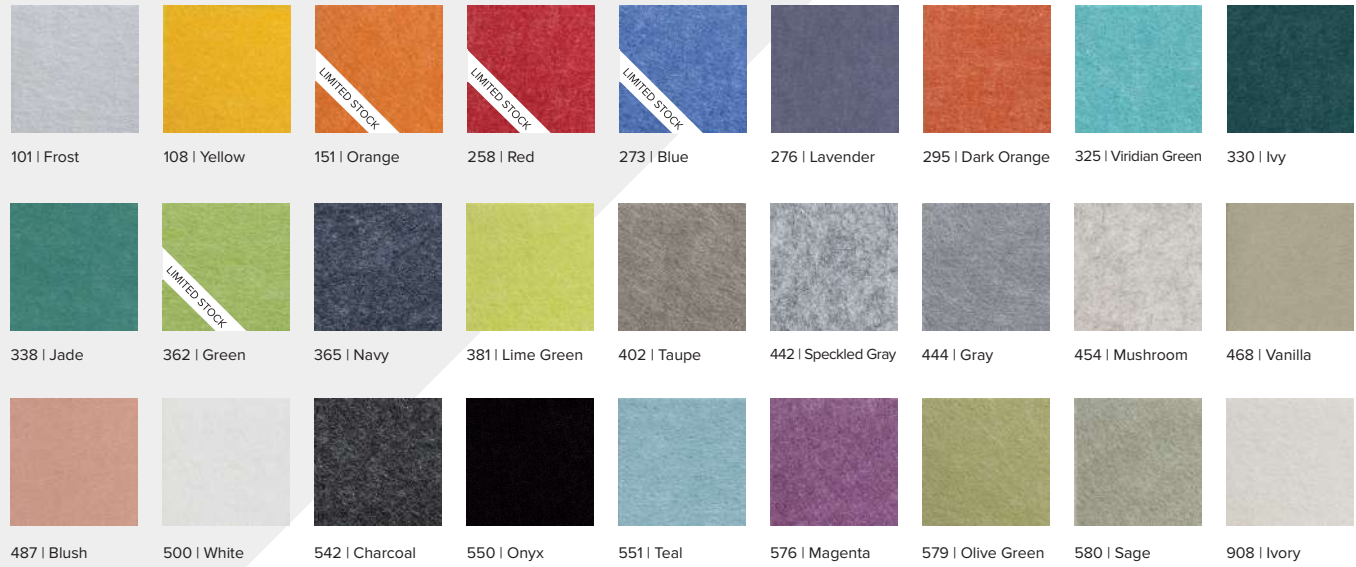

## Hardware & Installation

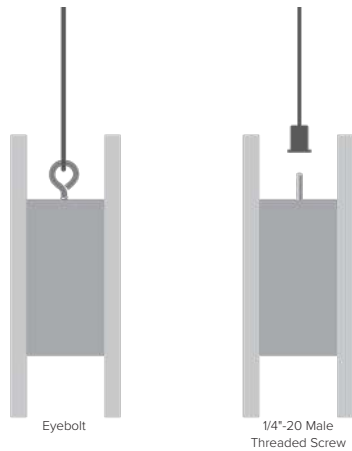

Mounting Hardware Options

### Hanging Hardware

H-Baffles have two attachment points with a 1/4"-20 female thread and come with your choice of eyebolts or 1/4"-20 male threaded screw hardware.

To install H-Baffles, attach the specified ceiling mounting hardware and suspension cable/chain/rod/etc. with the appropriate connector at the bottom end. Once the ceiling hardware is installed, attach the connector to the supplied attachment hardware on the H-Baffle.

*Note: Kirei does not provide ceiling mounting hardware or cable/chain/rod.*