


DASH TILES

INSTALLATION GUIDE

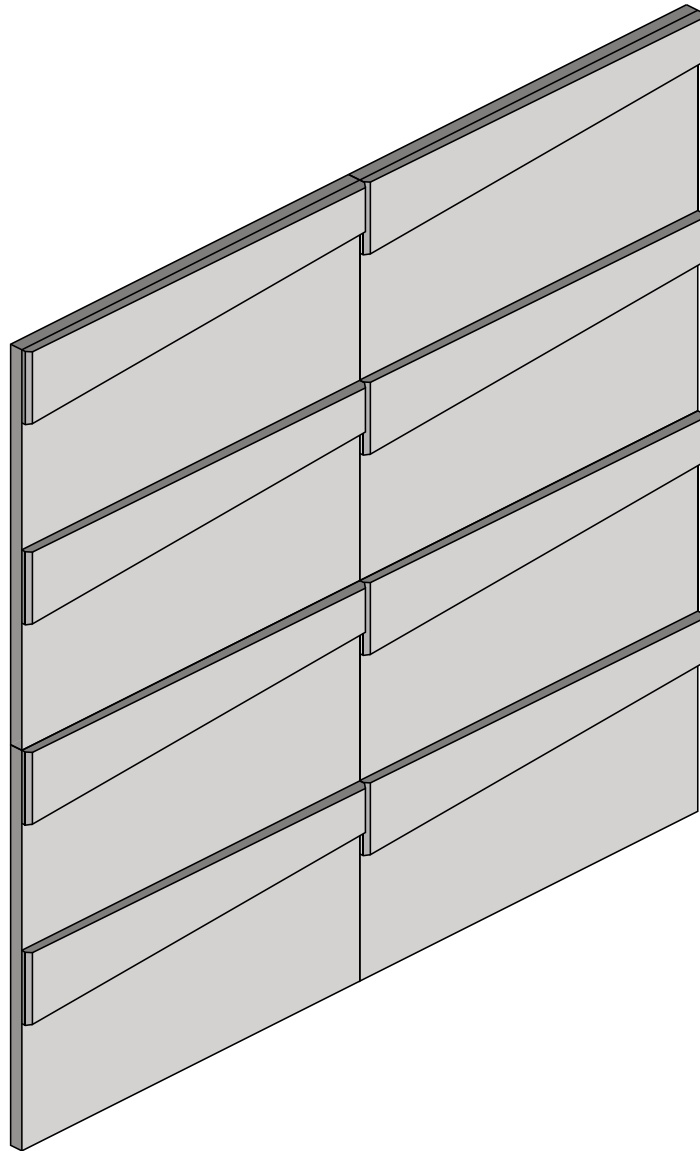

kirei

IMPORTANT INFORMATION

Installation

Please read the entire Installation Guide prior to application. This installation guide is intended to provide installers with helpful information regarding Dash Tiles prior to installation. Kirei accepts no responsibility for installation actions taken or not taken. This installation guide is not intended to be an in-depth guide; installer's knowledge as an experienced tradesman needs to be applied.

If you have questions about application or techniques, contact Kirei. Kirei will not be responsible for any cutting or mounting not performed by Kirei staff.

Terms of Trade

All Dash Tiles are inspected prior to shipment. Kirei is not responsible for damage in shipment or in storage; customers should carefully inspect all items at time of delivery and note any obvious damage on the delivery receipt. For the customer's protection, subsequently discovered concealed damage must be reported immediately to the carrier. Claims to Kirei will not be considered if the sheet has been worked on by the customer or others. No claims for labor charges will be allowed in any circumstances.

Work Safety

In the interest of work safety, it is recommended that people working with Dash Tiles wear the appropriate safety equipment. Although the product emits zero off-gases, masks and gloves should be worn to ensure the maximum possible safety precautions. For an SDS form, please contact Kirei.

Cleaning

See the [Handling and Cleaning Guide](#) for more information.

Dash Tile Specs

See the [Dash Tile Spec Sheet](#) for product details and information.

Product & Installation Questions


PH: 619.236.9924

Email: info@kireiusa.com


Web: kireiusa.com

HANDLING


Carry boxes and tiles upright.

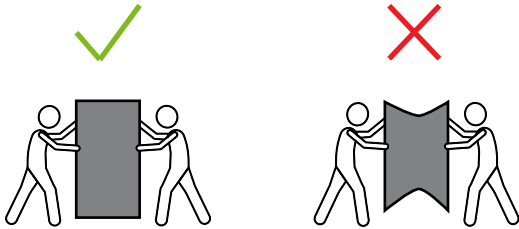


Keep all surfaces clean for storage and fabrication.

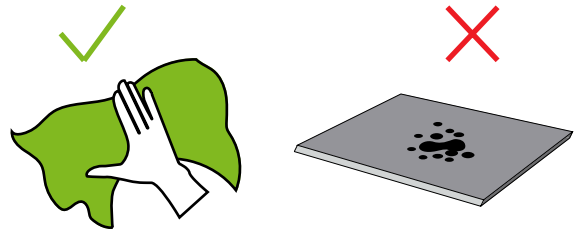


Store boxes and tiles flat.

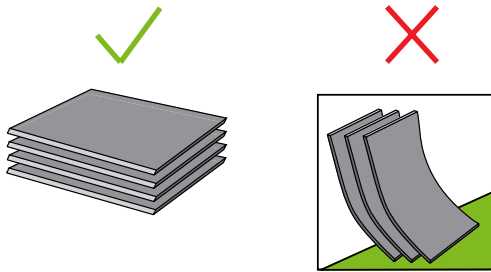


Store in a cool, dry place with no direct sun. Avoid 145 degree temperatures or greater.

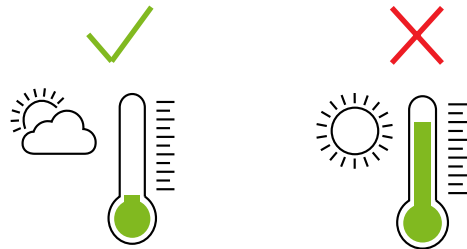


Wear gloves for handling light colors.

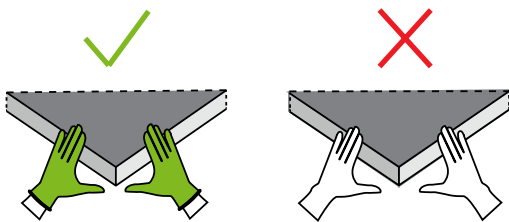


Upon delivery, inspect all goods for order corrections and damage.

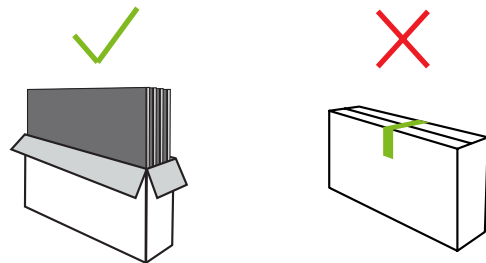

Keep product dry and avoid humidity.

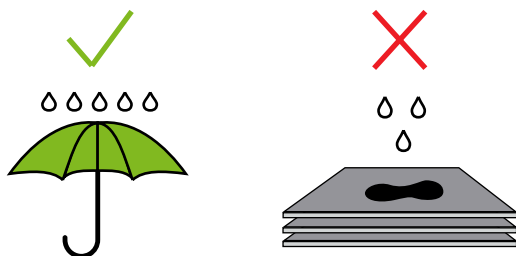


Protect the edges.

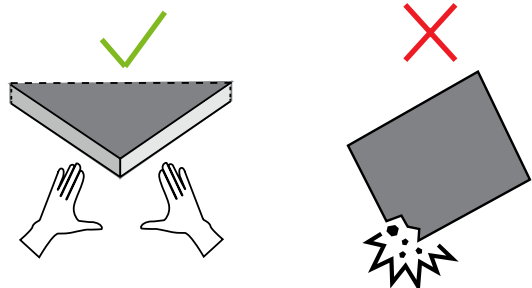

DIMENSIONS

Dash Tile Front View

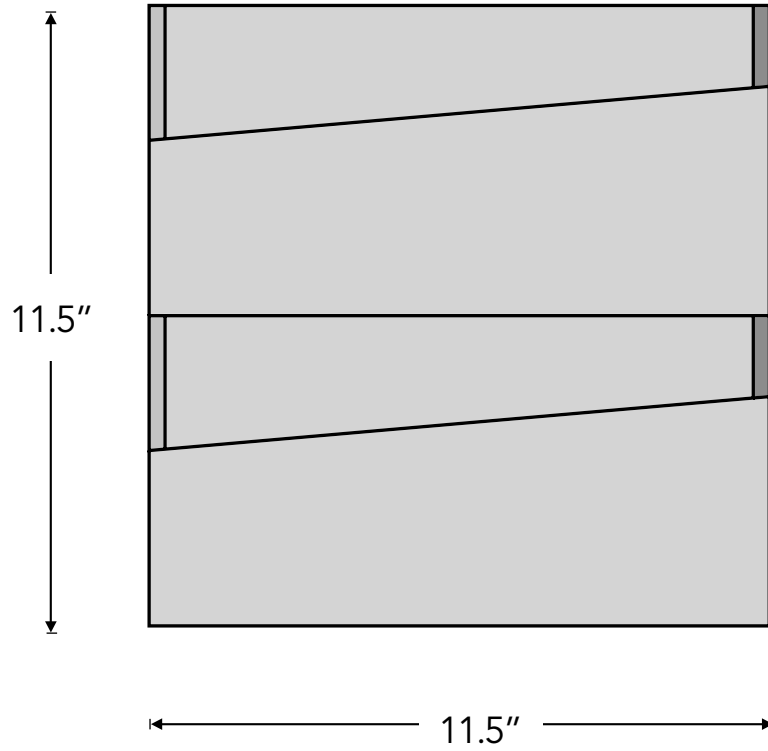


Dash Tile Side View



TOOLS MAY BE NEEDED



Level

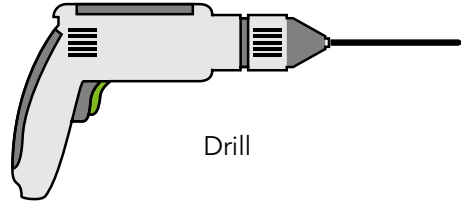


Drill



Adhesive




Screw Driver



Tape Measure

Not all tools are needed for installation, but depending on install choice, could be used.

ITEMS INCLUDED

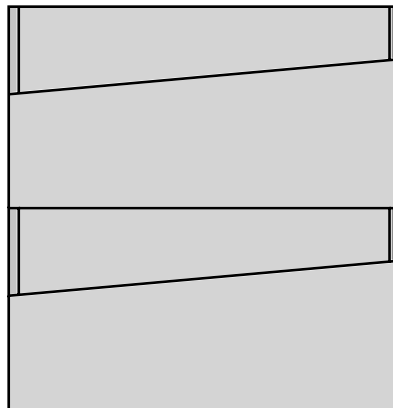


Dash Tiles (12 per box)

INSTALLATION


Dash Tiles can be adhered to walls and ceiling using adhesive or mechanical fasteners. Adhesive is the recommended installation method for Dash Tiles.

The recommended adhesives to use with Dash Tiles include Loctite PowerGrab Construction Adhesive, Loctite PL 3X Premium Construction Adhesive, Liquid Nails LN903 Heavy-Duty Construction Adhesive, AFM Safecoat Almighty Adhesive (solvent free solution), and ChemLink BuildSecure Construction Adhesive (solvent free solution). **Do not use PVA Glue for an adhesive for Dash Tiles.**

- 1** Clean and prepare surface per adhesive guidelines, then apply adhesive evenly on tile back leaving room at edges for glue to spread.

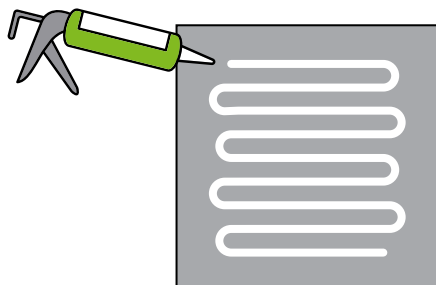


- 2** Adhere to wall surface per layout and maintain even pressure per adhesive manufacturer time and instructions. Clean off any excess adhesive.

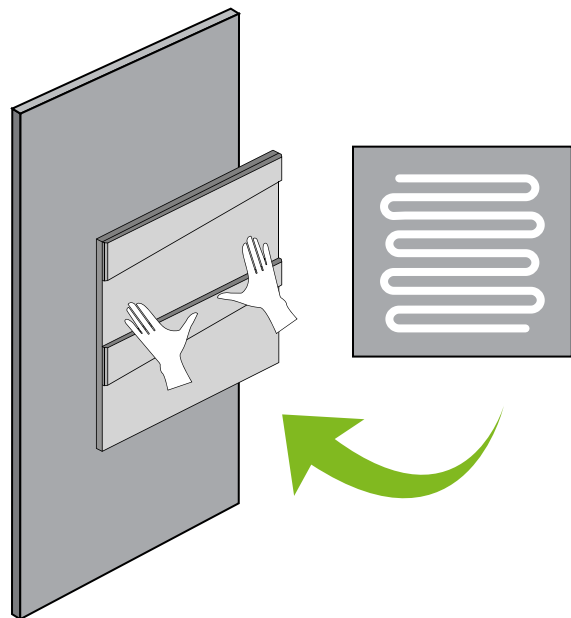


INSTALLATION



When a continuous pattern is desired from tile to tile, ensure tiles are abutted and aligned properly per layout.

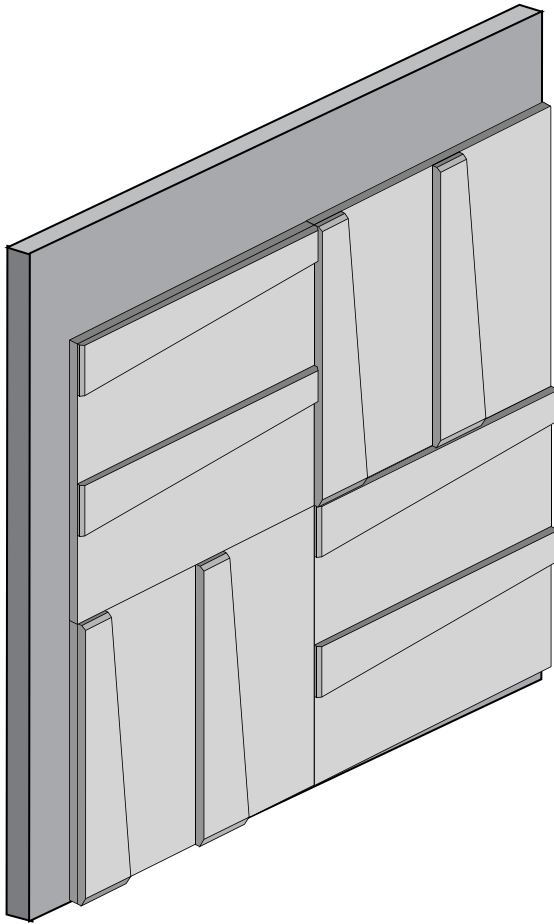

Abutted Tiles in Rotated Pattern

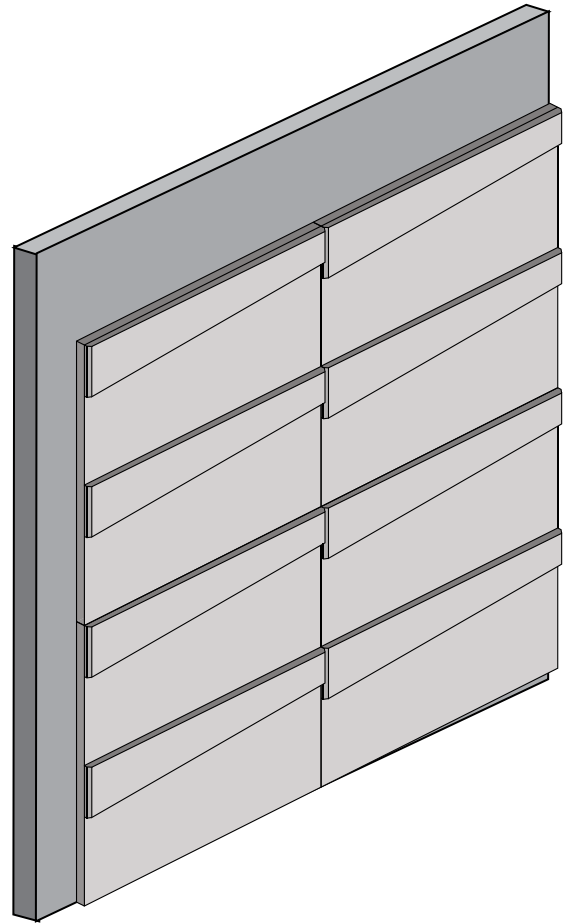

Abutted Tiles in Continuous Pattern

kirei

CONTACT INFORMATION

Phone: 619.236.9924

Email: info@kireiusa.com

Web: kireiusa.com

Our Mission

Kirei strives to inspire a beautiful world by providing architects, interior designers, and placemakers with sustainable architectural design elements for inspiring healthy spaces.

Committed To Sustainability

Kirei prioritizes sustainable design in our materials and our process. Our products must contain a minimum of 50% or more recycled material, meet or exceed CDPH standards for VOCs, and must be Red List Free and Declare Label qualified/certified. From tiles made of plastic bottles to baffles filled with Nike Grind, being "green" is a key quality of all our products.

Our Proven Process

Our proven process is simple and guides all that we do. We listen and learn the needs of a designer's project to inspire and assist through the specification process. We get the spec right, working with installers and contractors to get accurate bid information. We provide best-in-class service that includes reliable delivery and installer support, ensuring that each project gets exactly what it needs when it needs it. Finally, we celebrate the designer, their project, and the win!