

Specs

Style	Standard (LxH)	Depth	Weight/Box	Qty/Box	SF/Box
Ascent Tile	35.43" x 19.69"	1.97"	10.2 lbs	6	28.99

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Woven Image			
Tile: 100% PET (67% post-consumer recycled) Infill: 100% PET (60% recycled) Clips: Polycarbonate resin			
ASTM E84 Class A			
Available upon request			
*In stock for immediate shipment			
CDPH (CA 01350) Compliant TVOC: <0.5 mg/m3 Ecospecifier GreenTag Compliant TVOC: 0.015 mg/m2/hr (ASTM D5116)			

^{*}Actual lead times are determined when the project goes into production and can change based on production schedule and all quantities, color and thicknesses being in stock at time of order. See Kirei's Product Lead Time Disclosure for more information.












Acoustic Data


Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m²/Object	3.46	6.92	8.66	9.20	9.63	9.09	0.70
m²/Object (25mm infill)	7.90	10.06	10.17	10.17	9.95	9.31	0.90

Acoustic data is measured in Sabins per Ascent Tile.

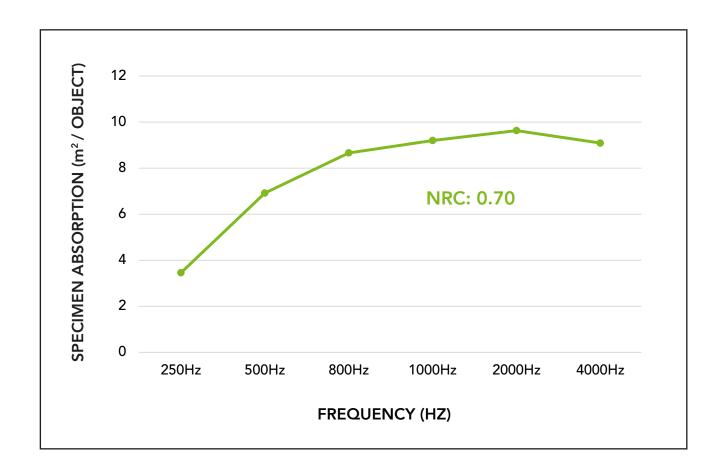

Product Dimensions

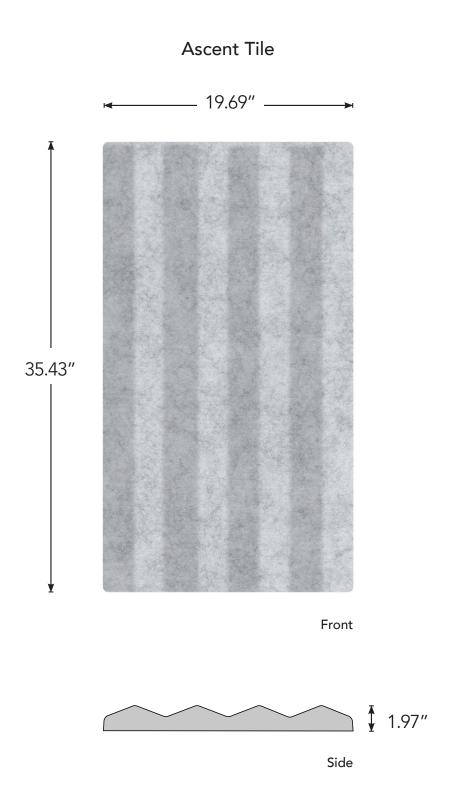



Available Colors



Installation

Each box includes 6 tiles and a bag of mixed clips appropriate for a 3 tile by 2 tile installation. Other layouts will require extra clips, available through Kirei. See the <u>Ascent Tiles Installation Guide</u> for more information.







Product shown: Ascent Tiles in Frost



Product shown: Ascent Tiles in Vineyard

kirei

Learn more and request your free sample: 619.236.9924 | sales@kireiusa.com kireiusa.com

All images in this spec sheet are supplied by Woven Image®.