


Vee Tile | Color 444 (Gray)

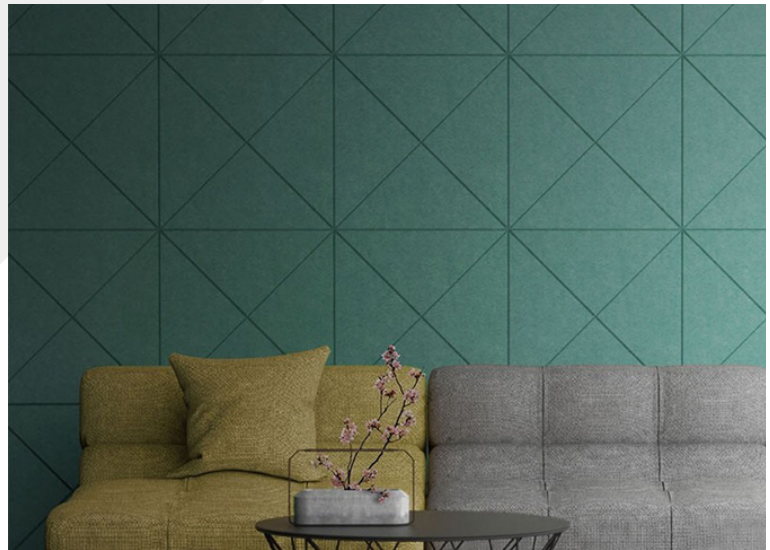

Vee Tiles | Color 338 (Jade)

	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Vee Tile	500mm x 500mm	19.7 in. x 19.7 in.	12mm	15 lbs	10	26.92

*All specs refer to singular products and not multiples unless specified.*

**Vee Tiles**

Vee Tiles are a modular acoustic design element with distinct patterning and color. The CNC-cut notch styling links together across tiles and can be oriented in a variety of directions to create multiple looks. Mix and match colors or use large color zones to boldly define spaces and control sound. Measure out guidelines prior to mounting tiles. Peel-and-stick design allows for easy installation.

**NRC (SOUND ABSORPTION RATING): ASTM C423-90A**

NRC .36 (no air gap)

**Fire Rating**

ASTM E84 Class C (Class A treatment available.)

**VOC Emissions**

CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m<sup>3</sup>  
 Ecospecifier GreenTag Compliant;  
 TVOC: 0.015 mg/m<sup>2</sup>/hr (ASTM D5116)



Vee Tiles | Colors 444 (Gray), 468 (Vanilla), 487 (Blush)


# ECHOPANEL TILES: VEE

kirei

## Available Solid Colors



## Installation

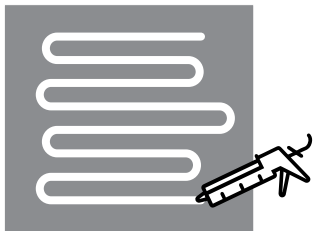

### Mount

When mounting use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.