

Ascent Tile



Ascent Tiles | Color 269 (Wine)
Image supplied by/courtesy of Woven Image®

Style	Metric	Standard	Depth	Thickness	Weight/Box	Tiles/Box	SF/Box
Ascent Tile	902mm x 498mm	35.5 in. x 19.6 in.	51mm (2 in.)	4mm	11 lbs	6	28.99

All specs refer to singular products and not multiples unless specified.

Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m ² /Object	3.46	6.92	8.66	9.20	9.63	9.09	0.70
m ² /Object (25mm infill)	7.90	10.06	10.17	10.17	9.95	9.31	0.90

Acoustic data is measured in Sabins per Ascent Tile.

Ascent Tiles


The peaked shapes of the Ascent Tile drape large spaces in linear allure. Designed by Woven Image and distributed in North America by Kirei, Ascent Tiles create a consistent, dimensional look through the soft corrugated design and slight reveal. The hollow, thermoformed tiles have a 50mm air gap and an optional infill to achieve an NRC of up to 0.90, delivering upscale acoustics disguised as a sophisticated statement.

Fire Rating

ASTM E84 Class A

VOC Emissions



ASTM D5116 Rate: 0.008 mg/m2/hr (7 days)

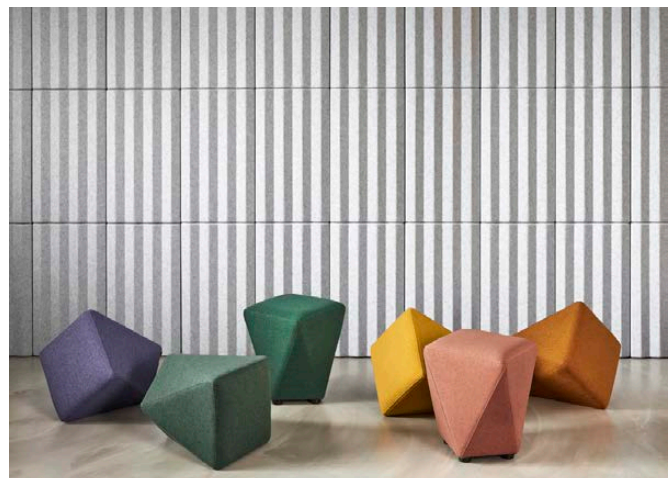

Ascent Tiles | Color 101 (Frost)
Image supplied by/courtesy of Woven Image®

ASCENT TILES

Dimension Detail

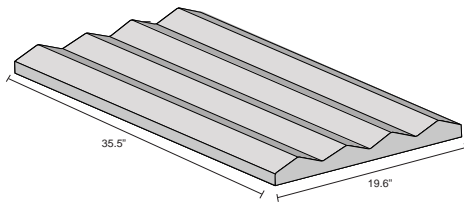

* Each tile has 50mm of airspace.


Available Solid Colors




101 | Frost



269 | Wine



349 | Vineyard



458 | Straw




487 | Blush




501 | Chalk



542 | Charcoal



577 | Eucalyptus



908 | Ivory

Hardware & Installation

Each box includes 6 tiles and a bag of mixed clips appropriate for a 3 tile by 2 tile installation. Other layouts will require extra clips, available through Kirei. Visit our website and download the installation guide for more information.

