

Tartan Tiles | Color 444 (Gray)



Tartan Tiles | Color 580 (Sage)

	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Tartan Tile	584mm x 584mm	23 in. x 23 in.	12mm	16 lbs	8	29.4

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur.

**Tartan Tiles**

Preserve the beauty and tranquility of your interior space with the harmonious lines of Tartan Tiles. Designed with 12mm EchoPanel® to add discreet sound absorption to your walls and ceilings. Easily repeat or randomize its relief patterns to create the look — and sound — you desire. Simple to install with construction adhesive and is available in a variety of colors from neutral to vibrant tones. Customization is also available for your unique design concepts.

**NRC (SOUND ABSORPTION RATING):  
ASTM C423-90A**

Standard EchoPanel NRC acoustic data is available for acoustic calculations. Please contact Kirei for this test data.

**Fire Rating**

ASTM E84 Class C (Class A achievable with treatment)

**VOC Emissions**


CDPH (CA 01350) Compliant;  
TVOC: <0.5 mg/m3  
Ecospecifier GreenTag Compliant;  
TVOC: 0.015 mg/m2/hr (ASTM D5116)



Tartan Tiles | Colors 276 (Lavender), 444 (Gray)

# ECHOPANEL TILES: TARTAN


## Dimensional Detail

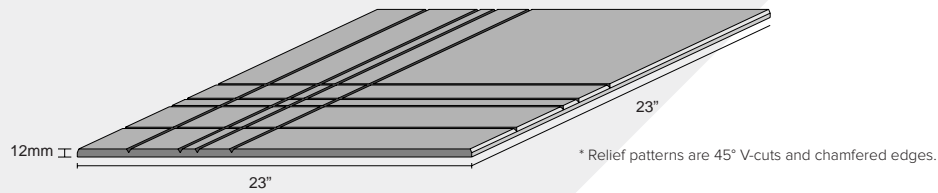

## Available Solid Colors



## Installation



### Mount

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on tile back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.