


EchoTile Vee

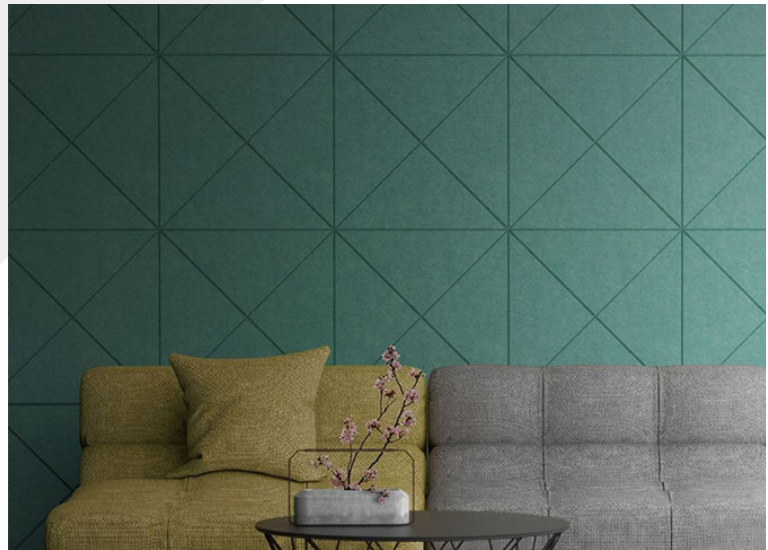

EchoTile Vee | Color 338 (Jade)

	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Vee Tile	500mm x 500mm	19.7 in. x 19.7 in.	12mm	15 lbs	10	26.92

All specs refer to singular products and not multiples unless specified.

EchoTile Vee

Vee tiles are a modular acoustic tile with a distinct v-cut groove patterning. The CNC-cut notch styling links together across tiles and can be oriented in a variety of directions to create multiple looks. Mix and match colors or use large color zones to boldly define spaces and control sound. Vee tiles are produced from 100% PET which, contains at least 60% post-consumer content.

NRC (SOUND ABSORPTION RATING): ASTM C423-90A

NRC .36 (no air gap)

Fire Rating

ASTM E84 Class C (Class A achievable with treatment)

VOC Emissions

CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m³

Ecospecifier GreenTag Compliant;
TVOC: 0.015 mg/m²/hr (ASTM D5116)




EchoTile Vee | Colors 444 (Gray), 468 (Vanilla), 487 (Blush)

Available Solid Colors

101 Frost	108 Yellow	124 Ochre	151 Orange	167 Cinnamon	193 Rouge	258 Red	269 Wine	273 Blue
274 Orchid	276 Lavender	295 Dark Orange	325 Viridian Green	330 Ivy	338 Jade	349 Vineyard	365 Navy	381 Lime Spice
384 Seaweed	402 Taupe	442 Speckled Gray	444 Gray	447 Slate	454 Mushroom	468 Vanilla	487 Blush	500 White
542 Charcoal	550 Onyx	551 Teal	576 Magenta	579 Olive Green	580 Sage	633 Pacific	660 Coronet	908 Ivory

Installation

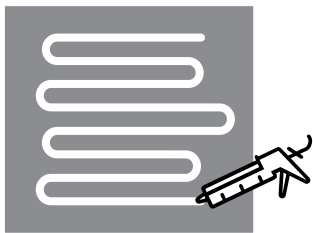

Mount

When mounting use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.