


Gem



Ion



Zen



Zen | Color 167 (Cinnamon)

	Metric	Standard	Thickness	Weight	SF/Panel
Gem	2799mm x 1130mm	110.2 in. x 44.5 in.	9mm	17.25 lbs	34
Ion	2799mm x 1130mm	110.2 in. x 44.5 in.	9mm	17.25 lbs	34
Zen	2799mm x 1130mm	110.2 in. x 44.5 in.	9mm	17.25 lbs	34

*All specs refer to singular products and not multiples unless specified.*

### Embossed Panel Series

Embrace the trend towards tactile surfaces and three-dimensional textures with the sustainable, cutting-edge design of the Embossed Panel Series. Designed by Woven Image and distributed by Kirei, the embossed acoustic panels create visual depth through the subtle play of light and shadow. Patterns range from the linear Zen to the origami-inspired Ion to the dramatic, diamond-like Gem. Available as full-size panels in three unique designs, the Embossed Panel Series is a floor-to-ceiling sound solution ready to delight.

### NRC (SOUND ABSORPTION RATING): ASTM C423-90A

NRC range .25 (direct) - .65 (50mm air gap)

### Fire Rating

ASTM E84 Class A

### VOC Emissions


ASTM D5116 Rate: 0.023 mg/m<sup>2</sup>/hr (7 days)



Ion | Color 124 (Ochre)

## EMBOSSED PANEL SERIES

### Available Design Styles

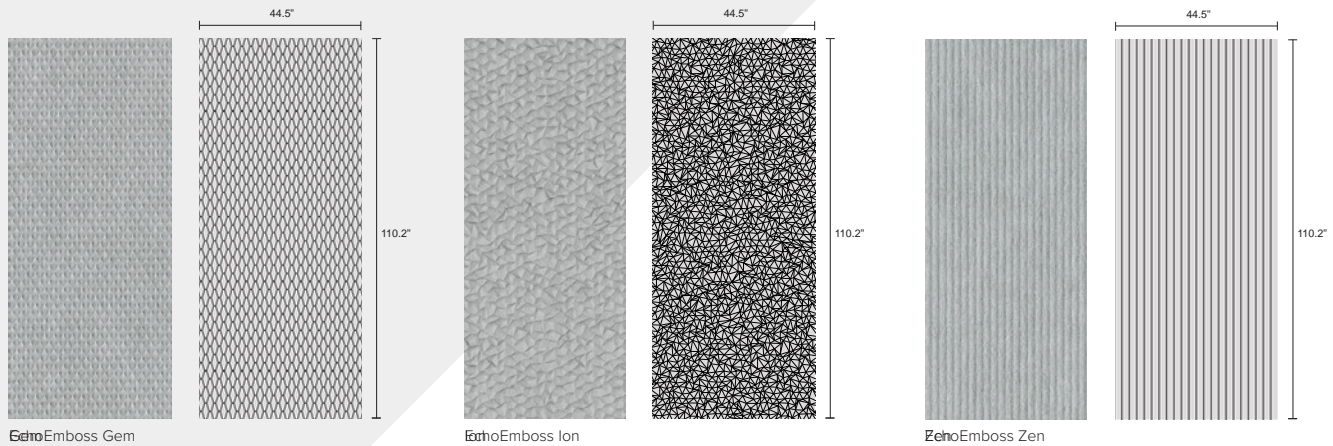

### Available Solid Colors



### Hardware & Installation



#### Mount

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on tile back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.