




Barcode Tile



Pixel Tile

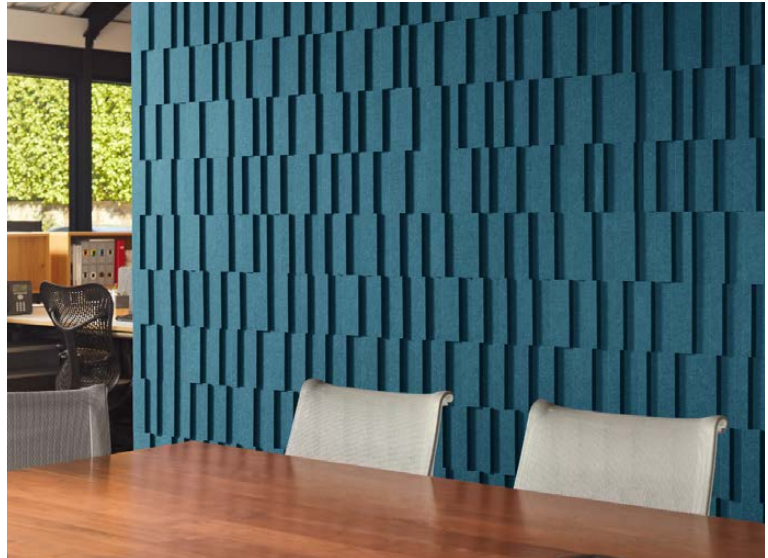

EchoTile Topo Barcode | Color 633 (Pacific)

Style	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Barcode Tile	393.7mm x 196.9mm	15.5 in. x 7.8 in.	24mm	8 lbs	12	10
Pixel Tile	254mm x 254mm	10 in. x 10 in.	24mm	7 lbs	16	11.1

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Sound Absorption Barcode Tile

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m ² /Object	0.62	2.76	4.70	5.53	6.55	7.05	0.60

Acoustic data is measured in Sabins per Barcode Tile.

Sound Absorption Pixel Tile

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m ² /Object	0.62	2.76	4.70	5.53	6.55	7.05	0.60

Acoustic data is measured in Sabins per Pixel Tile.

EchoTile Topo

Add visual appeal, texture and sound absorption to any flat wall with these 3-D tiles! Designed to be staggered, rotated, or aligned, Topo Tiles can be configured in numerous ways, offering a variety of design possibilities. Plus, the 36% layered coverage adds more sound absorption and diffusion! Installing Topo Tiles is easy; simply use standard construction adhesive suitable for PET plastic and wall surfaces and you're all set!

Fire Rating


ASTM E84 Class A

VOC Emissions


CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m³

Ecospecifier GreenTag Compliant; TVOC: 0.015 mg/m²/hr (ASTM D5116)

Available Design Styles




Barcode Tile



Pixel Tile

Available Solid Colors



Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on panel back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.