


WAVE TILES



Wave Tile

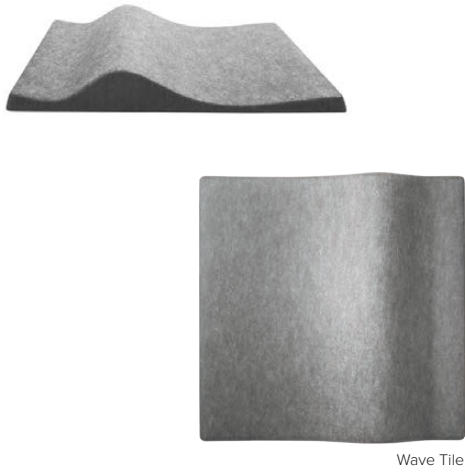

Wave Tiles | Color 487 (Blush)
Image supplied by/courtesy of Woven Image®

Style	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Wave Tile	500mm x 500mm	19.7 in. x 19.7 in.	60mm	10 lbs	9	24.21

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m ² /Object	1.60	4.60	6.20	6.70	8.40	8.60	0.55

Acoustic data is measured in Sabins per Wave Tile.

Wave Tiles

Wave Tiles help you design healthy rooms easily with style by adding motion, dimension, and acoustic control to any wall or ceiling. Thermoformed Wave Tiles are lightweight and highly sound absorbent with a speedy clip system that enables fast installation. Wave Tiles achieve Class A fire rating right out of the box, and have at least 60% recycled content to help contribute to LEED credits. Each box contains 9 tiles plus clips for 3 tile x 3 tile installation.

Fire Rating

ASTM E84 Class A

VOC Emissions



CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m3
Ecospecifier GreenTag Compliant;
TVOC: 0.015 mg/m2/hr (ASTM D5116)




Wave Tiles | Color 577 (Eucalyptus)
Image supplied by/courtesy of Woven Image®

WAVE TILES

Dimension Detail



Available Solid Colors

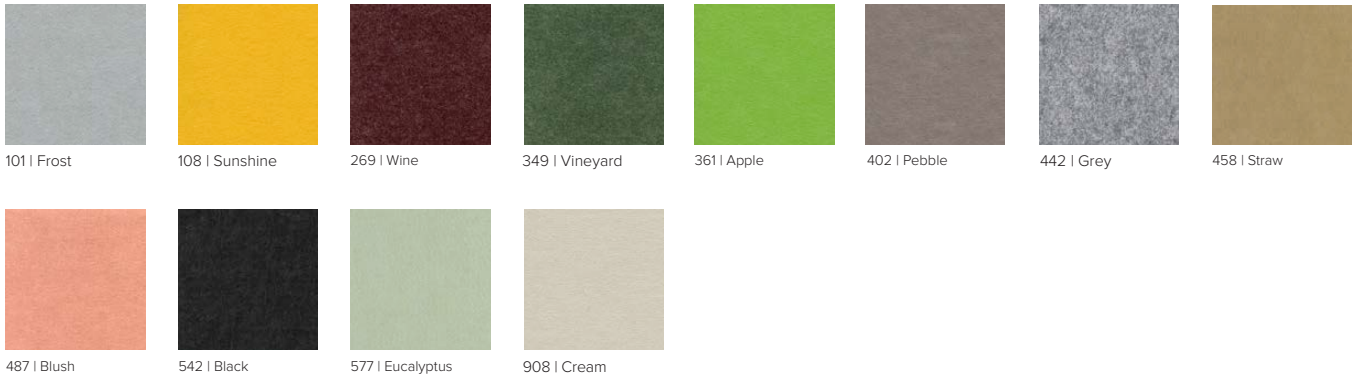

Hardware & Installation

Each box includes 9 tiles and a bag of mixed clips appropriate for a 3 tile by 3 tile installation. Other layouts, like the 1030x636 installation below, will require extra clips, available through Kirei. Visit our website and download the installation guide for more information.

