

H-Baffle



H-Baffle | Color 276 (Lavender)

Style	Metric	Standard	Width	Weight	LF/Unit
40" Length Baffle	1016mm x 229mm	40 in. x 9 in.	84mm	4.5 lbs	3.3
48" Length Baffle	1219mm x 229mm	48 in. x 9 in.	84mm	5 lbs	4
72" Length Baffle	1829mm x 229mm	72 in. x 9 in.	84mm	8 lbs	6
96" Length Baffle	2438mm x 229mm	96 in. x 9 in.	84mm	10 lbs	8

All specs refer to singular products and not multiples unless specified. Custom options available upon request.

Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	Average
m ² /Object	1.94	5.10	5.85	6.49	6.27	5.96	4.75

Acoustic data is measured in Sabins per H-Baffle.

H-Baffle

Designed to absorb excessive noise while adding dimension and texture to the ceiling, the H-Baffle helps create acoustically healthy and visually interesting spaces. It can be ceiling-hung at any height, in regular rows, or random groupings to create wayfinding or other visual design solutions. Custom lengths are available.

Fire Rating

ASTM E84 Class C (Class A achievable with treatment.)

VOC Emissions


CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m³

Ecospecifier GreenTag Compliant;
TVOC: 0.015 mg/m²/hr (ASTM D5116)



H-Baffle | Color 444 (Gray)

Available Solid Colors

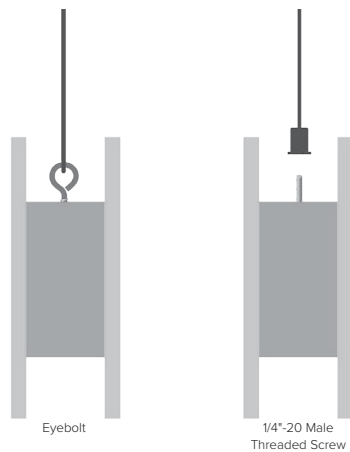

Mounting Hardware Options

Hardware & Installation

H-Baffles have two attachment points with a 1/4"-20 female thread and come with your choice of eyebolts or 1/4"-20 male threaded screw hardware.

To install H-Baffles, attach the specified ceiling mounting hardware and suspension cable/chain/rod/etc. with the appropriate connector at the bottom end. Once the ceiling hardware is installed, attach the connector to the supplied attachment hardware on the H-Baffle.

Note: Kirei does not provide ceiling mounting hardware or cable/chain/rod.