

H-Baffle | Colors 258 (Red), 325 (Viridian Green), 365 (Navy), 444 (Gray), 576 (Magenta), & 579 (Olive Green)

Style	Metric	Standard	Width	Weight	LF/Unit
40" Length Baffle	1016mm x 229mm	40 in. x 9 in.	84mm	4.5 lbs	3.3
48" Length Baffle	1219mm x 229mm	48 in. x 9 in.	84mm	5 lbs	4
72" Length Baffle	1829mm x 229mm	72 in. x 9 in.	84mm	8 lbs	6
96" Length Baffle	2438mm x 229mm	96 in. x 9 in.	84mm	10 lbs	8

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request.

Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	Average
m ² /Object	1.94	5.10	5.85	6.49	6.27	5.96	4.75

Acoustic data is measured in Sabins per H-Baffle.

H-Baffle

Designed to absorb excessive noise while adding dimension and texture to the ceiling, the H-Baffle helps create acoustically healthy and visually interesting spaces. It can be ceiling-hung at any height, in regular rows, or random groupings to create wayfinding or other visual design solutions. Custom lengths are available.

Fire Rating

ASTM E84 Class A


VOC Emissions

CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m³
 Ecospecifier GreenTag Compliant;
 TVOC: 0.015 mg/m²/hr (ASTM D5116)



H-Baffle | Color 444 (Gray)

Available Solid Colors

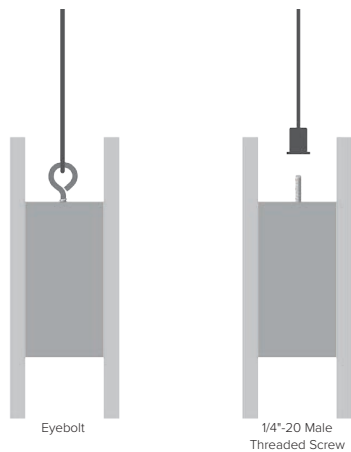

Mounting Hardware Options

Hardware & Installation

H-Baffles have two attachment points with a 1/4"-20 female thread and come with your choice of eyebolts or 1/4"-20 male threaded screw hardware.

To install H-Baffles, attach the specified ceiling mounting hardware and suspension cable/chain/rod/etc. with the appropriate connector at the bottom end. Once the ceiling hardware is installed, attach the connector to the supplied attachment hardware on the H-Baffle.

Note: Kirei does not provide ceiling mounting hardware or cable/chain/rod.