

EchoLine Square 2.0 | Color 660 (Coronet)

Style	Metric	Standard	Thickness	Weight	SF/Panel	Min. Radius
45 (0.5)	1151mm x 2731mm	45.3 in. x 107.5 in.	12mm	19 lbs	35.5	n/a
45 (1.0)	1151mm x 2731mm	45.3 in. x 107.5 in..	12mm	19 lbs	35.5	n/a
45 (2.0)	1151mm x 2731mm	45.3 in. x 107.5 in.	12mm	19 lbs	35.5	n/a
45 (4.0)	1151mm x 2731mm	45.3 in. x 107.5 in.	12mm	19 lbs	35.5	n/a
Groovy 0.5	1168mm x 2743mm	46 in. x 108 in.	12mm	18 lbs	34.5	16 in.
Groovy 1.0	1168mm x 2743mm	46 in. x 108 in.	12mm	18 lbs	34.5	20 in.
Groovy 3.0	1168mm x 2743mm	46 in. x 108 in.	12mm	18 lbs	34.5	36 in.
Square 2.0	1168mm x 2743mm	46 in. x 108 in.	12mm	18 lbs	34.5	24 in.
Subway	1168mm x 2743mm	46 in. x 108 in.	12mm	16.5 lbs	29.6	n/a
Wavy 2.0	1168mm x 2743mm	46 in. x 108 in.	12mm	17 lbs	33	n/a

All specs refer to singular products and not multiples unless specified. Due to the nature of the material, cutting and fabrication process, minor dimensional variances may occur. Custom options available upon request. EchoLine is sold individually and ships flat.

Sound Absorption

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m ² /Object	0.34	0.88	1.96	2.73	4.47	6.18	0.30

Acoustic data is measured in Sabins per EchoLine Groovy 0.5.

EchoLine

Energize spaces with dynamic lines that are going places. EchoLine’s simple, consistent groove pattern adds subtle or striking dimension to wall or ceiling surfaces. Easy to install, EchoLine’s controlled playfulness is linear design that fixes acoustic imbalances for happier, healthier occupants.

Fire Rating


ASTM E84 Class A

VOC Emissions


CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m³
Ecospecifier GreenTag Compliant; TVOC: 0.015 mg/m²/hr (ASTM D5116)

ECHOPANEL: ECHOLINE


Available Design Styles

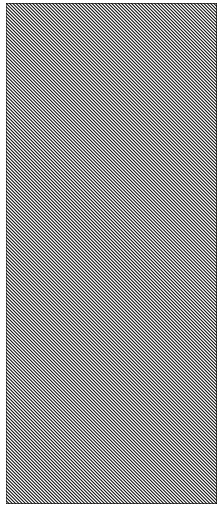


45 (0.5)

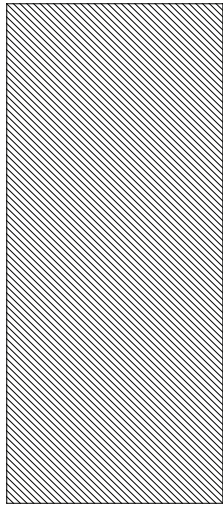


45 (1.0)

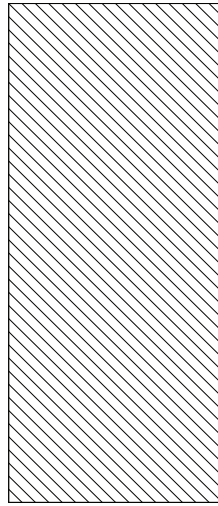


45 (2.0)

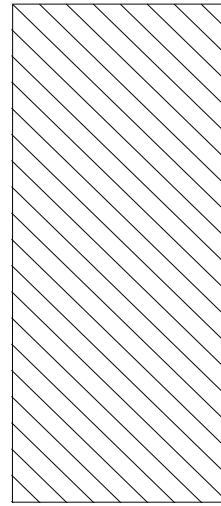


45 (4.0)

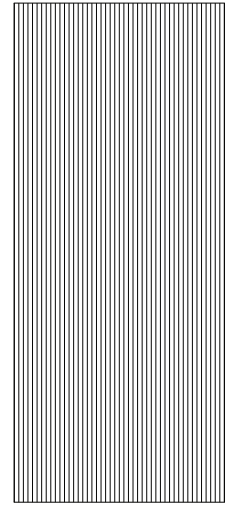


Groovy 0.5

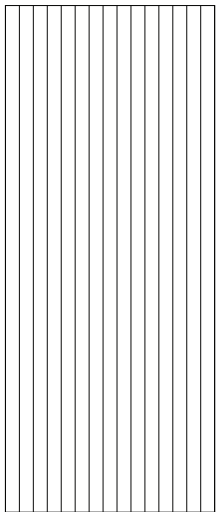


Groovy 1.0

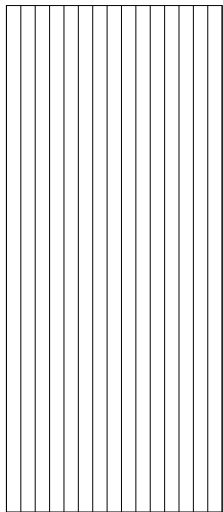


Groovy 3.0

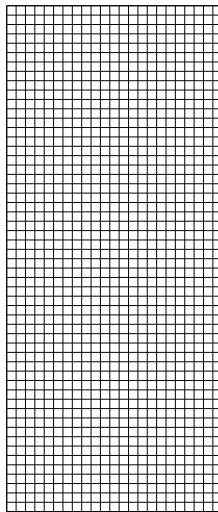

Square 2.0

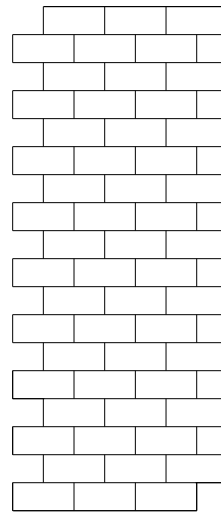

Subway

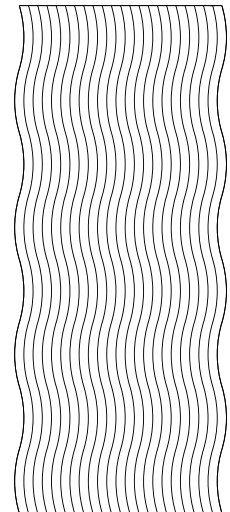

Wavy



EchoLine Wavy 2.0 | Color 487 (Blush)



EchoLine Groovy 1.0 | Color 338 (Jade)


Available Solid Colors



EchoLine 45 (2.0) | Color 274 (Orchid)



EchoLine Subway | Color 442 (Grey)

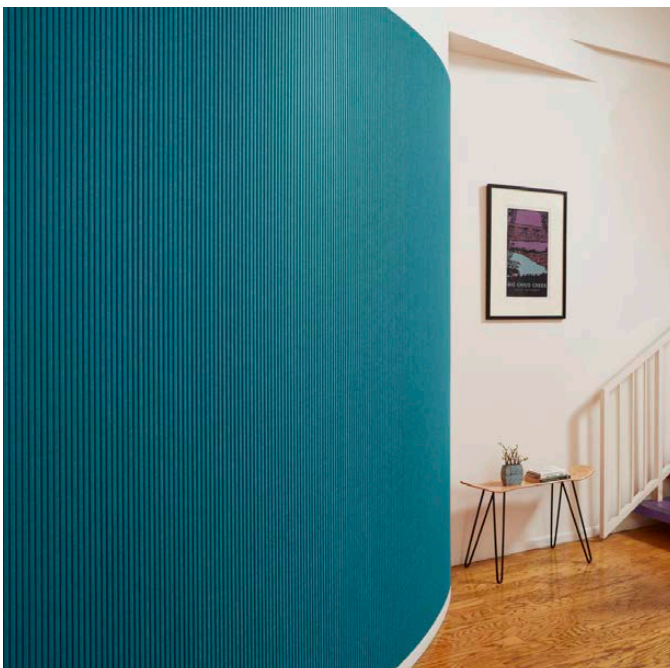

EchoLine Groovy 0.5 | Color 633 (Pacific)

Installation

When mounting, use standard construction adhesives (e.g. Liquid Nails/Titebond - NOT PVA glue). Clean and prepare surface per adhesive guidelines. Spread adhesive evenly on tile back, leaving 2" space at edges. Adhere to wall surface, providing bracing to hold material against surface per adhesive open time/instructions.

