

Dune Tile



Dune Tiles | Colors 349 (Vineyard) & 908 (Ivory)  
Image supplied by/courtesy of Woven Image®

Style	Metric	Standard	Thickness	Weight/Box	Qty/Box	SF/Box
Dune Tile	500mm x 500mm	19.7 in. x 19.7 in.	50mm	10 lbs	9	24.21

All specs refer to singular products and not multiples unless specified.

**Sound Absorption**

Frequency	250Hz	500Hz	800Hz	1000Hz	2000Hz	4000Hz	NRC
m <sup>2</sup> /Object	1.20	5.40	6.70	7.20	8.90	8.50	0.60

Acoustic data is measured in Sabins per Dune Tile.

**Dune Tiles**

Dune Tiles provide a steady design force and rhythmic form to quickly add dimension and acoustic control to any wall or ceiling. Thermoformed Dune tiles are lightweight and highly sound absorbent with a speedy clip system that enables fast installation. Dune Tiles achieve Class A fire rating right out of the box, and has at least 60% recycled content to help contribute to LEED credits. Each box contains 9 tiles plus clips for 3 tile x 3 tile installation.

**Fire Rating**

ASTM E84 Class A

**VOC Emissions**


CDPH (CA 01350) Compliant; TVOC: <0.5 mg/m<sup>3</sup>  
Ecospecifier GreenTag Compliant;  
TVOC: 0.015 mg/m<sup>2</sup>/hr (ASTM D5116)



Dune Tiles | Color 444 (Grey)  
Image supplied by/courtesy of Woven Image®

# DUNE TILES

## Dimension Detail

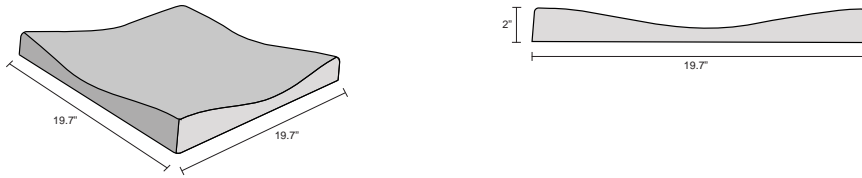

## Available Solid Colors



## Hardware & Installation

Each box includes 9 tiles and a bag of mixed clips appropriate for a 3 tile by 3 tile installation. Other layouts, like the 1030x636 installation below, will require extra clips, available through Kirei. Visit our website and download the installation guide for more information.

