



EchoRidge ACT Installation Guide

Note: Please read the entire Installation Guide before application.


The installation guide is intended to provide installers with helpful information regarding EchoRidge ACT prior to installing the material. Kirei accepts no responsibility for installation actions taken or not taken. This installation guide is not intended to be an in-depth guide; installer's knowledge as an experienced tradesman needs to be applied.

This installation guide serves only as a recommendation for installing and handling EchoRidge ACT. If you have questions about application or techniques, contact Kirei at www.kireiusa.com or 619.236.9924.

Installation

Always make sure your platform or ladder is safe and secure before ascending.

1. Ensure all surfaces and T-grid are clean prior to installation to prevent scuffs and staining.
2. Make sure hands and/or gloves are clean before handling the material.
3. EchoRidge ACT installs just like standard ACT tiles. Hold EchoRidge ACT flat side up (so that the folded elements are facing down). Please ensure that you have 8"-10" unobstructed clearance above the T-Grid to ensure the EchoRidge ACT can pass through the opening.
4. Angle the tile so that you can insert one end in first.
5. Insert the tile almost completely into the ceiling.
6. Carefully drop tile into place, ensuring that the T-grid doesn't scrape the edges.
7. Visually inspect all four corners checking that they are properly seated.

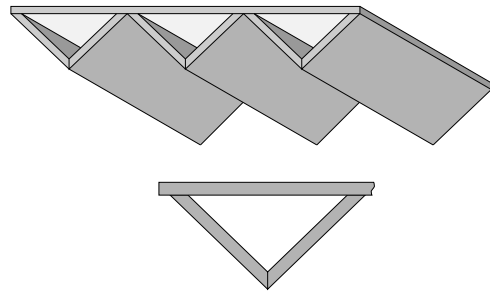

Work Safety

In the interest of work safety, it is recommended that people working with EchoRidge ACT wear the appropriate safety equipment. Although the product emits zero off-gases, masks and gloves should be worn to ensure the maximum possible safety precautions. For an SDS form, please contact Kirei at info@kireiusa.com or 619-236-9924.

Final Note

Kirei will not be responsible for any cutting or mounting not performed by Kirei staff.

For any other questions or concerns, please contact Kirei.